Avery Dennison® ICS Performance Guarantee Paint Protection Films



The ICS Performance Guarantee combines our films with other qualified components to form a system which is guaranteed and provides superior performance. You know exactly what to expect from your Avery Dennison Paint Protection Film as it has already withstood rigorous scientific testing and met a stringent set of durability and physical performance.

The ICS Performance Guarantee only extends to you as the original purchaser of the Avery Dennison Paint Protection Film and is not transferable.

Avery Dennison® Paint Protection Films	Durability period*	eriod* Application Surface			
	Outdoor	Flat	Simple curves	Compound curves	Corrugations
Supreme Protection Film-XI	10 years	✓	~	✓	×
Supreme Protection Film-X3	10 years	✓	✓	✓	×
Supreme Protection Film-Gloss Black	10 years	~	~	~	×
Supreme Protection Film-Matte	10 years	~	✓	✓	×

^{*} Durability period starts from installation date of the product





Paint Protection Films

Definition of durability and potential durability reductions


The durability of Avery Dennison Paint Protection Films is defined as the expected performance life of the Avery Dennison paint protection film(s) within the European region in outdoor vertical exposure conditions. The durability is defined such that the films will not deteriorate excessively, i.e the finished product remains effective for its purpose when viewed under normal conditions from the intended viewing distance. The actual performance life will depend on a variety

of factors, including selection and preparation of substrate, angle and direction of exposure, application methods, environmental conditions and cleaning/maintenance of the films. In case of films used in areas of high temperatures or humidity, high altitudes, industrially polluted areas or the durability will be further reduced below levels stated in this ICS Performance Guarantee document.

Horizontal exposure

Angle and direction of exposure

The face of the graphic is upto 10° from vertical.

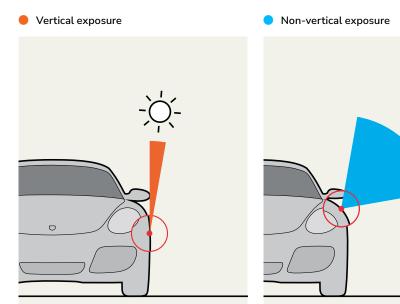

The face of the graphic is between 10° and 85°

The face of the graphic is between 85° and 90° from vertical.

The angle and direction of exposure in the images above are illustrative examples and may differ from actual applications.

from vertical.

Definition of durability and potential durability reductions

High elevations: In mountain areas UV damage is increased over exposures at sea level. This is due to the air being thinner and therefore damage of UV radiation increases significantly. Congested urban or industrial areas: Due to increased smog, pollutants and particulates in

the atmosphere, applications have reduced durability expectations. Also horizontal application traps chemicals on the surface of the material, increasing the impact of UV exposure and reducing durability.






Additional information on Paint Protection Films Durability

Zone system Europe

Based on a 3-tier climatic Zone System, durability in regions as located in Zone 1 will perform in vertical applications as stated in the product datasheets and this particular ICS Performance Guarantee Bulletin.

Based on this value, expected durabilities in zone 1 (non-vertical), zone 2 (vertical and non-vertical) and zone 3 (vertical and non-vertical) are derived and reported in table below.

Zone 1 (values as in this ICS bulletin)			
• Vertical	Non-vertical/ Horizontal		
10 years	7 years		

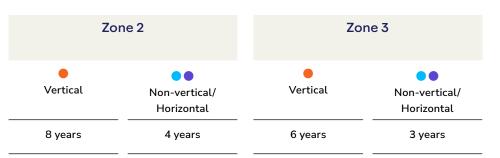

Andorra, Austria, Belarus, Belgium, Bosnia & Herzegovina, Bulgaria, Croatia, Czech Republic, Denmark, Estonia, Finland, France (excluding Corsica and Reunion), Georgia, Germany, Hungary, Iceland, Ireland, Italy (North and Central), Kosovo, Latvia, Liechtenstein, Lithuania, Luxembourg, North Macedonia, Moldova, Monaco, Montenegro, Netherlands, Norway, Poland, Romania, Russia, San Marino, Serbia, Slovakia, Slovenia, Sweden, Switzerland, Ukraine, United Kingdom, Vatican City

Albania, Armenia, Azerbaijan, Corsica, Kazakhstan, Kyrgyzstan, Greece, Italy (South of Rome), Malta, Mauritius, Portugal, Reunion, San Marino, Spain (excl. Canary Islands), Tajikistan, Turkey, Turkmenistan, Uzbekistan Algeria, Bahrain, Canary Islands, Cyprus, Egypt, Eritrea, Ethiopia, Iraq, Israel, Jordan, Kuwait, Lebanon, Libya, Morocco, Oman, Pakistan, Qatar, Saudi Arabia, South Africa, Tanzania, Tunisia, United Arab Emirates, Yemen

Excluding all sites (mentioned in zones 1, 2 and 3) above altitudes of 1000 meters.

Limitation of liability

Subject to any limitations or exclusions imposed by mandatory applicable law and the exclusion of any indirect, incidental or consequential loss, damage or injury, including without limitation, loss of anticipated profits, goodwill, reputation, or losses or expense resulting from third party claims. Avery Dennison's aggregate liability to the original purchaser, whether for negligence, breach of contract, misrepresentation or otherwise, shall in no circumstances exceed the price of the defective, non-conforming, damaged or undelivered

Products which give rise to such liability as determined by net price invoices to Purchaser in respect of any occurrence or series of occurrences.

For further details regarding the limitation of Seller's liability under this warranty, please refer to Avery Dennison's general terms and conditions of sale, which shall be applicable to all Avery Dennison products that are sold.

graphics.averydennison.eu

Facebook LinkedIn Instagram







©2022 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.